



## FŰTÉS 8-13W - RC 016

01602.0-03

RC 016 8W Heater, 150°C, 12-36V ac/dc



- Kompakt
- Önszabályozó



### TERMÉKLEÍRÁS

The heat source in this Stego element consists of a PTC element – a semi-conductor that adapts its output to the ambient temperature.

The PTC element has a high starting current and provides full output almost immediately.


The current then falls quickly and the element is thereafter self-regulating, meaning that the warmer the surroundings, the less output produced by the element.

The heating element is best installed in small enclosures so as avoid condensation or that the temperature falls beneath the minimum. These heaters are designed for permanent operation.

### MŰSZAKI ADATOK

Heat Output	8 W
Heater	Eloxált alumínium
Humidity Storage	<90 % RH
IP-osztály	IP54
Jóváhagyások	CE, EAC, Gost R, RoHS, UL E150057, VDE
Kábelhossz	300 mm
Magasság	30 mm
Max. feszültség	36 V ac/dc
Max. indítóáram	4 A
Mélység	12,5 mm
Nominal voltage	24 V AC/DC

<b>Operating Humidity</b>	< 90% RH
<b>Operational Temperature</b>	-45°C ... +70°C
<b>Pre fuse (slow)</b>	2 A
<b>Szélesség</b>	25 mm
<b>Tárolási hőmérséklet</b>	-45°C ... +70°C
<b>Tömeg</b>	0,02 kg
<b>Védelmi osztály</b>	II (kettős szigetelésű)
<b>Voltage min</b>	12 V ac/dc

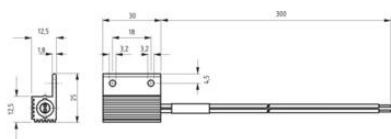

Thermostat  
KTO 011 (NC)

Heater RC 016

