



KÁBELEK CSATLAKOZÓKKAL

ORL0301960



- 4 tűs és 7 tűs M16 csatlakozók
- Az Orlaco fejlesztette ki a legjobb EMC védelem érdekében
- -40 és +85 °C között



TERMÉKLEÍRÁS

MŰSZAKI ADATOK


Anyag	PVC
IP-osztály	IP67
Kábelátmérő	6 mm
Kábelhossz	1000 mm
Max. üzemi hőmérséklet	85 °C
Min. üzemi hőmérséklet	-40 °C
Type	Analóg

Front side
female connectorFront side
male connector


Electrical connection

1 = Coax core	= Video signal
2 = Coax shielding	= Video GND
3 = Red	= 12V/DC
4 = Black	= 0V
Shielding	= GND

Dimensions





Front side molded 7P Female connector




Front side molded 7P Male connector

**Electrical connection
molded connectors**
 1 = Coax Core
 2 = Coax Shield
 3 = Red (Power input)
 4 = Black (0V)
 5 = Orange (Rx)
 6 = Yellow (Tx)
 7 = Grey (Aux)

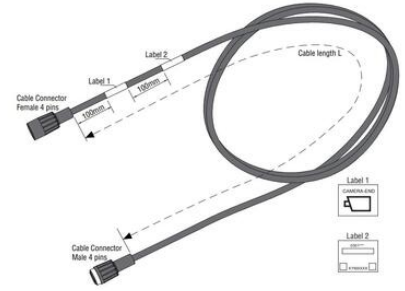


Front side female connector




Front side male connector

Electrical connection
 1 = Coax core = Video signal
 2 = Coax shielding = Video GND
 3 = Red = 12V/DC
 4 = Black = 0V
 Shielding = GND



Front side molded 7P Female connector



Front side molded 7P Male connector

**Electrical connection
molded connectors**
 1 = Coax Core
 2 = Coax Shield
 3 = Red (Power input)
 4 = Black (0V)
 5 = Orange (Rx)
 6 = Yellow (Tx)
 7 = Grey (Aux)

Dimensions

