




PIEZOELEKTROMOS ZÚGÓK

716149

SUS-6149 / FK DC 24V




- 24 VDC tápegység
- Névleges áram 0,03 / 0,018 A
- Hangerősség 85/92 dB
- DIN sínre vagy csavaros rögzítés

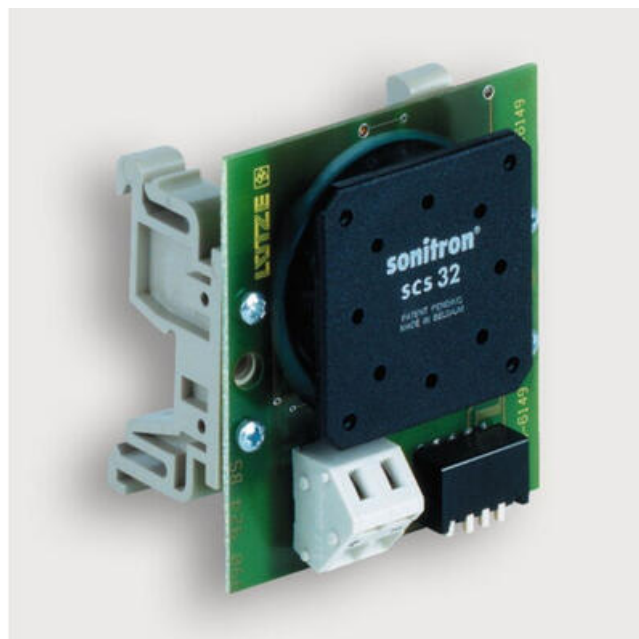


TERMÉKLEÍRÁS

MŰSZAKI ADATOK

Connection type	Rugós szorító
Felszerelés	DIN sín
Frequency bandwidth	200–4000 Hz
Input voltage range	10–30 V DC
Jóváhagyások	EN 45545-2:2013+A1:2015, EN 50121-3-2:2016, EN 50155:2017, EN 50124-1:2017, EN 61373:2010
Méretek	50×55×37 mm
Névleges áramerősség	0,03 A
Sound pressure	92 dB
Supply voltage	24 V DC
Temperature range	-40...+70 (+85 10 min.) °C
Tömeg	0,028 kg



switch 1 position	switch 2 position	switch 3 position	switch 4 position	frequency
OFF	OFF	OFF	OFF	200Hz
ON	OFF	OFF	OFF	280Hz
OFF	ON	OFF	OFF	300Hz
ON	ON	OFF	OFF	350Hz
OFF	OFF	ON	OFF	400Hz
ON	OFF	ON	OFF	450Hz
OFF	ON	ON	OFF	500Hz
ON	ON	ON	OFF	550Hz



switch 1 position	switch 2 position	switch 3 position	switch 4 position	frequency
OFF	OFF	OFF	ON	600Hz
ON	OFF	OFF	ON	650Hz
OFF	ON	OFF	ON	700Hz
ON	ON	OFF	ON	800Hz
OFF	OFF	ON	ON	2500Hz
ON	OFF	ON	ON	3000Hz
OFF	ON	ON	ON	3600Hz
ON	ON	ON	ON	4000Hz